

Industrial Ball Joints & Linkage Rods

Related Products



Quick Disconnect Ball Joint Features

- BALL STUD**
- Carbon Steel
 - Protective Coated for Corrosion Resistance



- BODY**
- Carbon Steel
 - Protective Coated for Corrosion Resistance

- SLEEVE**
- Carbon Steel
 - Protective Coated for Corrosion Resistance

- SPRING**
- Stainless Steel

Quick Disconnect Ball Joints

PART NUMBER		DIMENSIONS IN INCHES													
Right Hand	Left Hand	A Thread UNF-2B	B ± .020	C ± .020	D Min.	E ± .020	F ± .020	G Min.	H Max.	J + .002 - .010	K Ref.	L ± .010	M Ref.	Tensile & Shear Strength	Force to Remove (Lbs.)
BJDR3	BJDL3	10-32	1.094	.906	.437	.437	.437	.125	.062	.312	.171	.312	.500	450	650
BJDR4	BJDL4	1/4-28	1.094	.906	.531	.469	.562	.125	.062	.312	.171	.312	.500	500	650
BJDR5	BJDL5	5/16-24	1.563	1.125	.563	.594	.689	.156	.094	.437	.232	.438	.680	1,000	1,000
BJDR6	BJDL6	3/8-24	1.940	1.563	.750	.719	.875	.188	.094	.500	.287	.562	.820	1,250	1,250

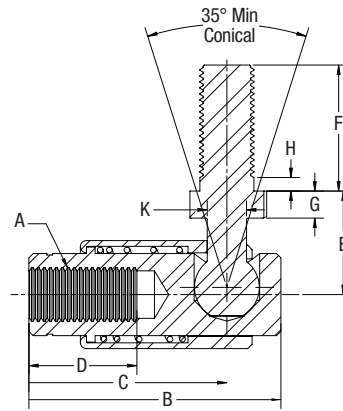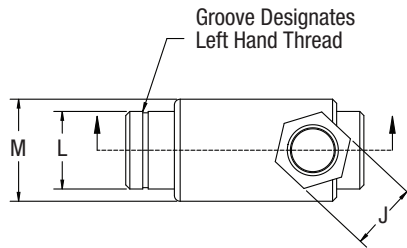


NEW Linkage Rod Features

- BODY**
- Carbon Steel
 - Protective Coated for Corrosion Resistance

Linkage Rods

PART NUMBER DIMENSIONS IN INCHES

	A ± .030	B ± .010	C + .060 - .030	D + .003 - .012	E ± .030	Thread UNF-3A
1698-114	7.00	.25	1.125	.218	1.5	1/4-28
1698-115	7.50	.25	1.125	.218	1.5	1/4-28
1698-120	20.00	.25	1.125	.218	1.5	1/4-28
1698-116	21.00	.25	1.125	.218	1.5	1/4-28
1698-117	4.50	.312	1.250	.250	1.5	5/16-24
1698-124	6.00	.312	1.250	.250	1.5	5/16-24
1698-125	9.00	.312	1.250	.250	1.5	5/16-24
1698-122	5.50	.375	1.375	.344	1.5	3/8-24
1698-118	9.00	.375	1.375	.344	1.5	3/8-24
1698-121	13.50	.375	1.375	.344	1.5	3/8-24
1698-119	20.25	.375	1.375	.344	1.5	3/8-24
1698-123	13.00	.500	1.625	.438	1.75	1/2-20

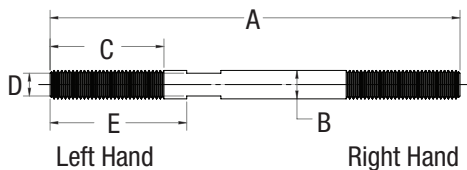

Related Products