



**INSTALLATION INSTRUCTIONS**


QA1 P/N RK17  
DOUBLE ADJUSTABLE REBUILD KIT

**TOOLS AND SUPPLIES REQUIRED**

- Pin Spanner Wrench
- Shock Stand
- 5wt QA1 Shock Oil (p/n SF16)

**REBUILD NOTES:**

QA1 shock rebuilding requires a basic knowledge of the internal shock components. Rebuilding a shock generally consists of replacing worn seals, filling the shock with oil, and bleeding any air out of the shock. QA1 does not offer step by step shock rebuilding instructions. Professional shock rebuilding can be found on our website at: [QA1.net/find-a-dealer](http://QA1.net/find-a-dealer).

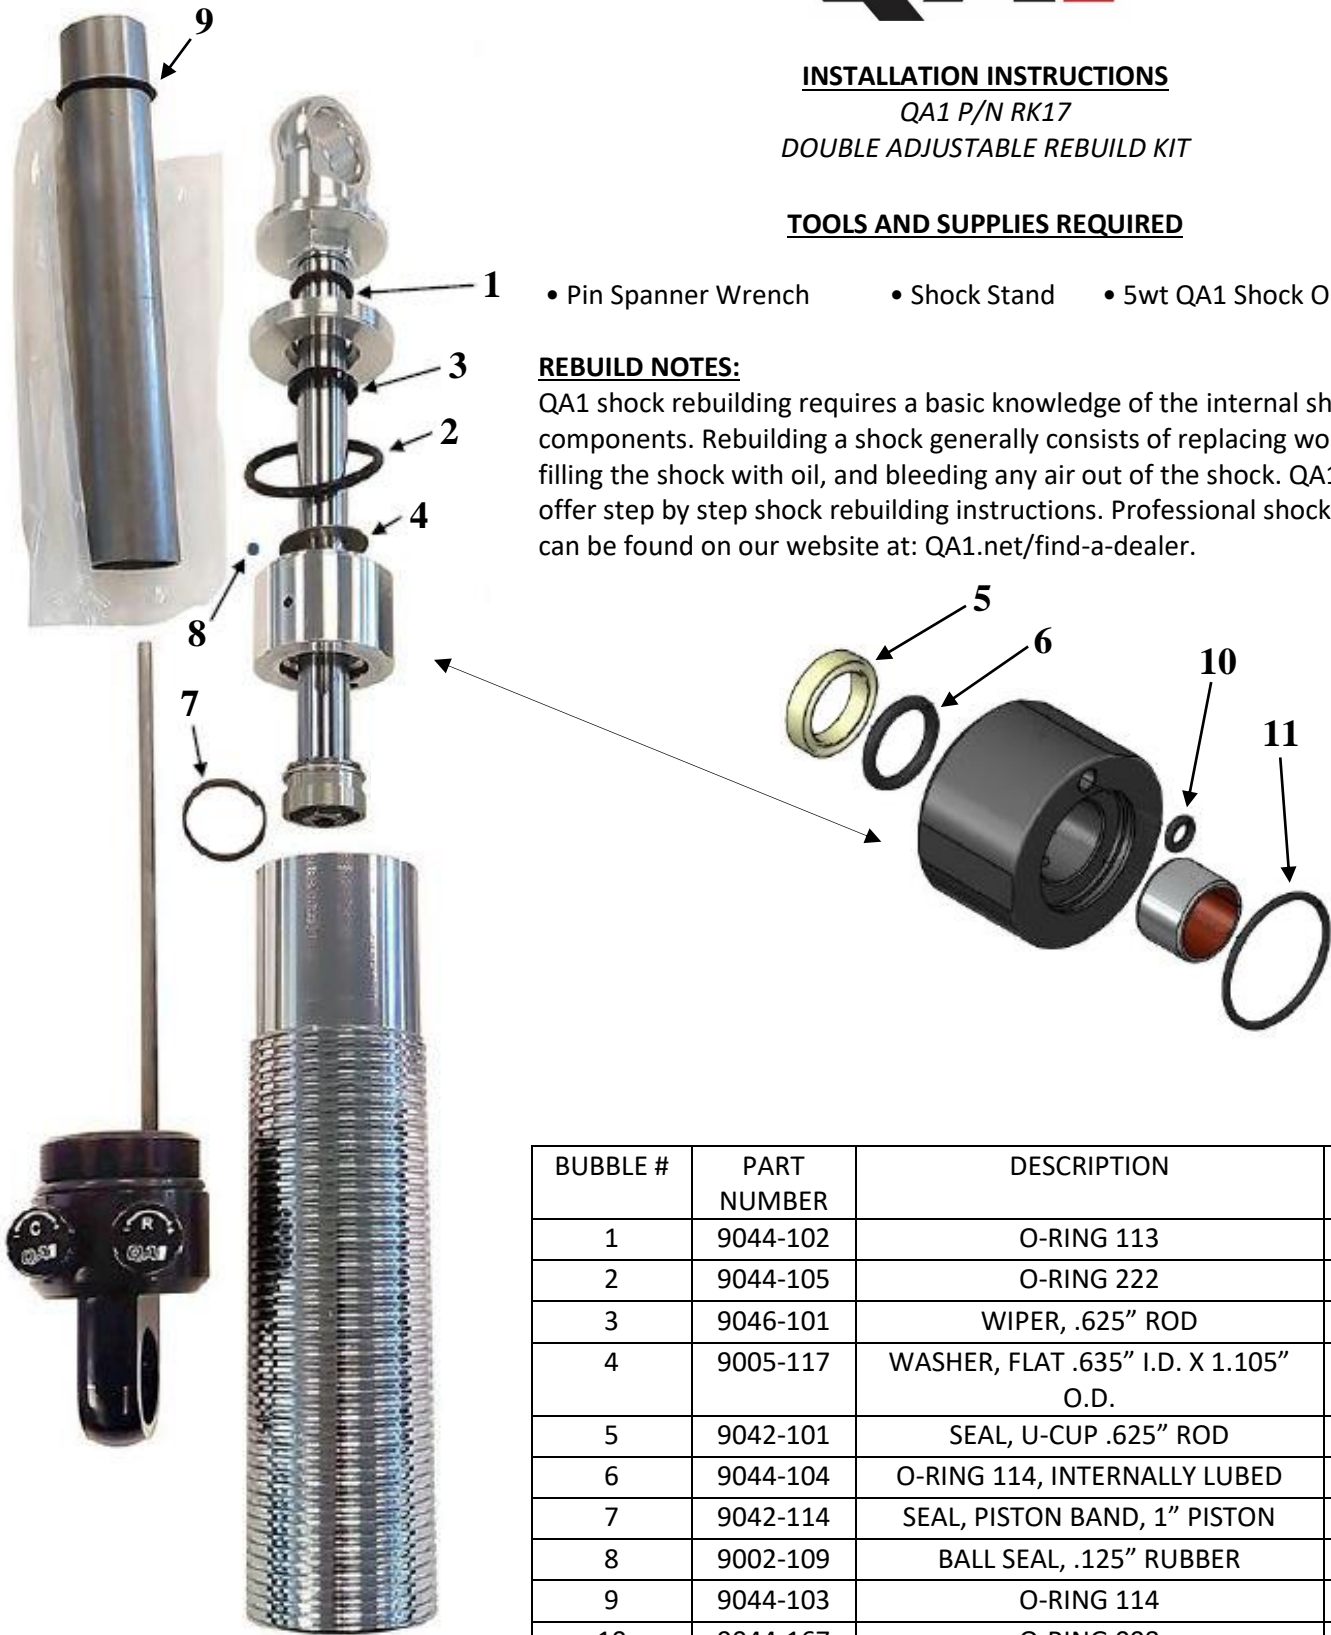

BUBBLE #	PART NUMBER	DESCRIPTION	QUANTITY INCLUDED
1	9044-102	O-RING 113	1
2	9044-105	O-RING 222	1
3	9046-101	WIPER, .625" ROD	1
4	9005-117	WASHER, FLAT .635" I.D. X 1.105" O.D.	1
5	9042-101	SEAL, U-CUP .625" ROD	1
6	9044-104	O-RING 114, INTERNALLY LUBED	1
7	9042-114	SEAL, PISTON BAND, 1" PISTON	1
8	9002-109	BALL SEAL, .125" RUBBER	1
9	9044-103	O-RING 114	1
10	9044-167	O-RING 008	1
11	9044-169	O-RING METRIC 1.5MM x 27.5MM	1