



CUSTOM CIRCLE TRACK CARBON FIBER DRIVESHAFT FORM

ORDER FORM

STEP 1: Select desired driveshaft type:

- 2.25" Dirt Modified (JJC-AC0230)
- 2.25" Dirt Late Model (JJC-AB0230)
- 2.25" Crate Late Model (JJC-AC0230)
- 3.2" Dirt Late Model (JJC-AB0310)

STEP 2: Engine specifications:

Make: _____ Engine Displacement: _____
 Horsepower: _____ Torque: _____ Max RPM: _____

STEP 3: Driveline information:

Transmission Make & Model: _____
 High Gear Ratio: _____ Low Gear Ratio: _____ Number of Splines on Output Shaft:¹ _____
 Rear Differential Gear Ratio: _____ Rear Tire Size: _____
 Current Driveshaft O.D.: _____ Max O.D. of Driveshaft: _____ Min. Distance to Exhaust: _____

¹ Some transmission yokes have missing splines. If counting the yoke, add the missing spline(s) to get the correct count. If counting the transmission output shaft, it will always have the correct count and no splines will be missing.

STEP 4: Select a U-joint series and slip yoke.

1. Choose a front and rear U-joint series, using the corresponding figures for dimensions:

Front	Rear	SFI 43.1*	Series	Joint Type	Figure	Cap Dia (D)	Width (E)	Cap Dia (F)	Width (G)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1310	Solid	1	1.063"	3.219"	1.063"	3.219"
<input type="checkbox"/>	<input type="checkbox"/>	-	1310-1330	Conversion	1	1.063"	3.219"	1.063"	3.622"
<input type="checkbox"/>	<input type="checkbox"/>	-	1310-1350	Conversion	1	1.063"	3.219"	1.188"	3.622"
<input type="checkbox"/>	<input type="checkbox"/>	-	1310-3R	Conversion	2	1.063"	3.219"	1.125"	2.556"

*To have your driveshaft certified to the SFI 43.1 standard is an additional \$35.

2. Choose a full spline slip yoke option:

- GM 27 - 1.503" O.D., 5.5" Long, Billet
- GM 27 - 1.500" O.D., 8.0" Long
- GM 32 - 1.886" O.D., 5.5" Long, Billet
- Ford 28 - 1.499" O.D., 6.0" Long, Billet
- Ford 31 - 1.684" O.D., 7.0" Long




FIGURE 1




FIGURE 2

STEP 5: Driveshaft measurements taken with vehicle at ride height:

(Measure to within 1/16". Surcharge applies for lengths over 40".)


Distance from center of front U-joint to center of rear U-joint (A)²: _____

Distance from end of transmission tail housing to center of rear U-joint (B): _____


Distance from end of output shaft to end of transmission tail housing (C): _____

Distance from end of slip yoke to center of front U-joint (D): _____

² Take this u-joint center-to-center measurement with the slip yoke in its operating position. The slip yoke operating position is typically determined by pulling the slip yoke out of the transmission 1" after it is fully bottomed out.

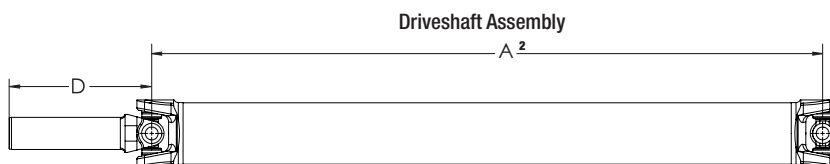

Detailed View
Minus the Driveshaft

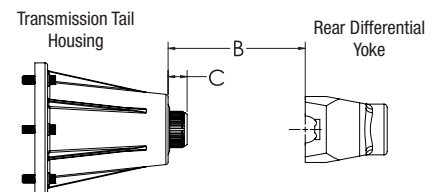



CUSTOM CIRCLE TRACK CARBON FIBER DRIVESHAFT FORM

PAYMENT & LEAD TIME

50% **non-refundable** deposit required on all custom driveshaft orders before production begins. The approximate lead time for a custom driveshaft is 2 weeks from receipt of completed order form, unless otherwise indicated in writing from QA1.

LEGAL DISCLAIMER NOTICE

This composite driveshaft product and related components are sold as-is without any warranty whatsoever, expressed or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose. QA1 assumes no responsibility or liability for the selection, installation or any use of the products. The end user acknowledges that the product will be used only for the vehicle specified on this form. The end user and any person who installs this product and related components are solely responsible for determination of the suitability of the product and components selected. The end user installs and uses the products and components at their own risk and agrees to fully indemnify QA1 against any claims, damages or losses resulting from the selection, installation or use of the products or related components.

Only experienced and qualified persons should install the products and components. Failure to properly install the product or related components may result in vehicle damage, personal injury or death.

QA1 IS NOT RESPONSIBLE FOR IMPROPER OR INCORRECT INFORMATION PROVIDED BY CUSTOMER.

ALL SALES FINAL.

Warning: Be sure to inspect all components regularly, especially following a crash. Do not use any components which may have been damaged.

Warning: If composite driveshaft is dropped or damaged, it should be taken out of service and replaced.

QUESTIONS?

For any questions, please contact QA1 at 800.721.7761 or 952.985.5675 to speak to a support specialist. Our office hours are Monday - Friday, 8 am - 5 pm CST.

SUBMITTING THE ORDER FORM

Please submit this completed order form to an authorized QA1 dealer or directly to QA1 via email at sales@qa1.net or via fax at 952.985.5679.

**COMPLETED
BY BUYER**

By signing below, I agree to the above disclaimer information and confirm that all information I have provided is accurate.

Signature: _____ **Date:** _____

Print Name: _____

Address: _____

City: _____ **State:** _____ **Zip:** _____

Email: _____ **Phone:** _____

**COMPLETED
BY DEALER**

QA1 Dealer Name: _____

Address: _____

City: _____ **State:** _____ **Zip:** _____

Email: _____ **Phone:** _____

Submitted to QA1 by: _____ **Date:** _____